


New products 2010

SECURIO P40, SECURIO P44, HSM FA 500.3

OMDD Cutting unit, PAPERcontrol, External oiler

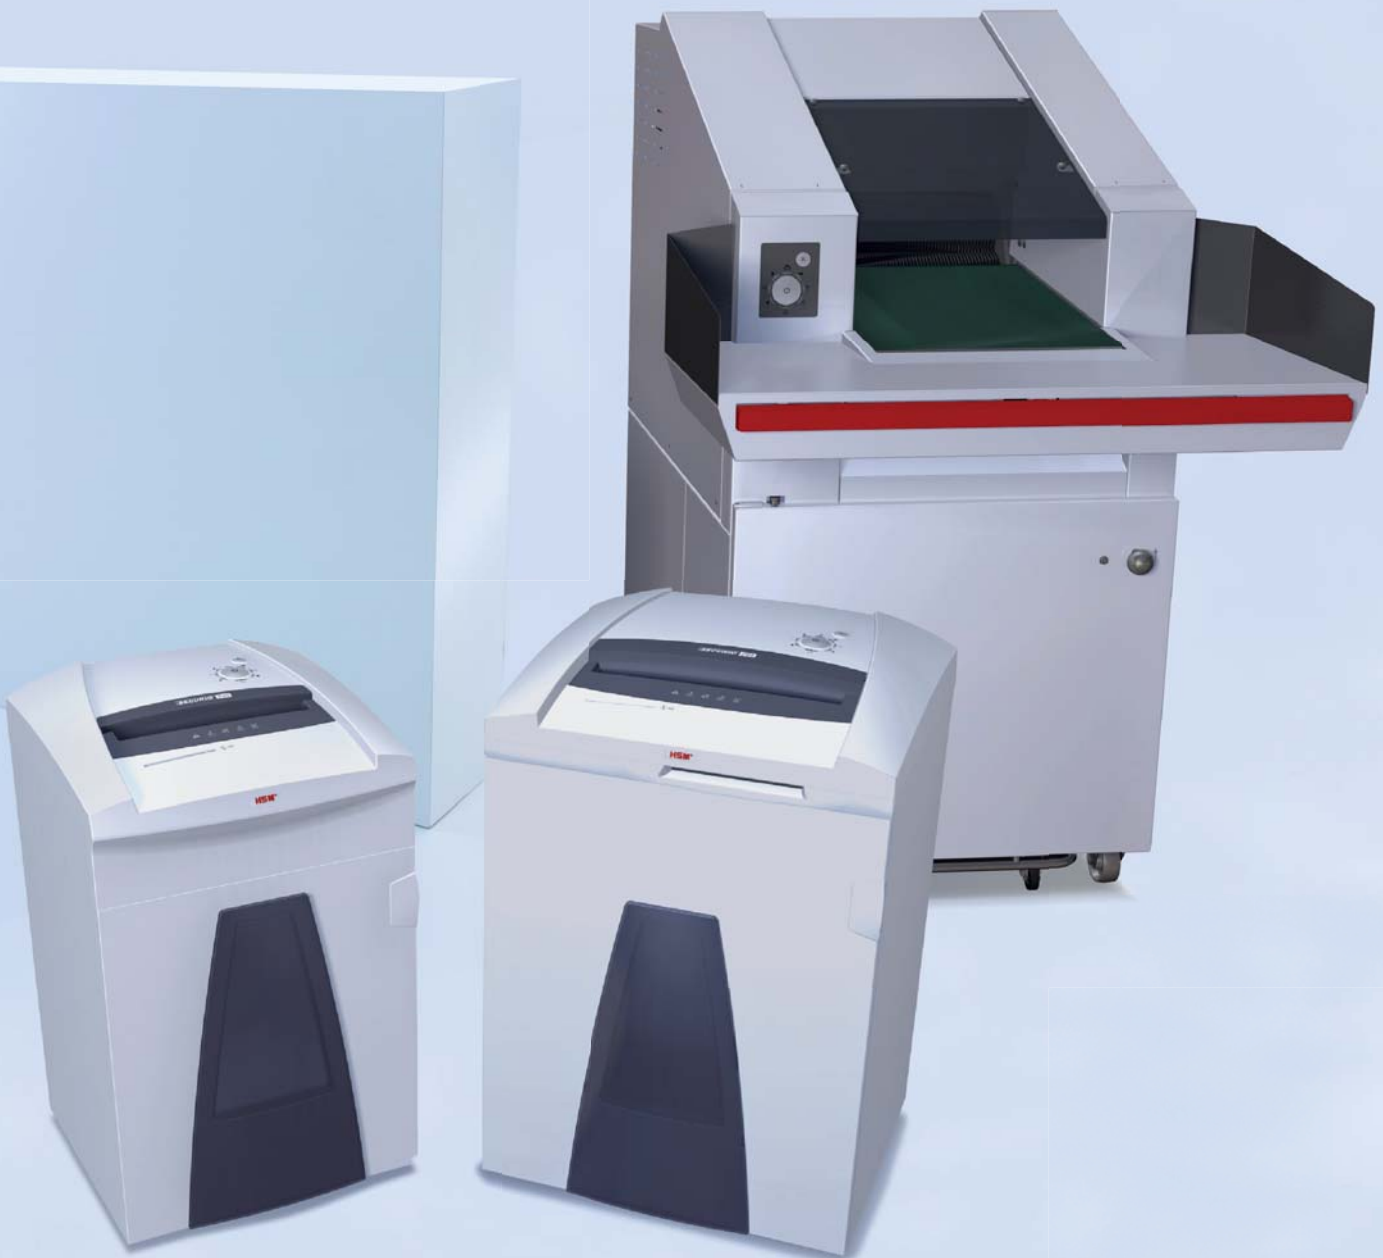

SECURIO P40 and P44 – high performance models for entire office departments

- SECURIO P44: High performance AC-current model
- Also shreds credit cards and customer cards, as well as CDs and diskettes, depending on security level or design
- Multi-function operating button, reverse button and integrated button lock
- Folding safety unit with contact protection and integrated service flap
- Automatic oiler for the cutting unit (particle cut versions only)
- Efficient energy management (EMCS)
- Separate cutting unit and separate waste container for shredding CDs/DVDs and diskettes (optional)
- Metal detection function (optional)
- PAPERcontrol function for checking the maximum feedable amount of paper, and for preventing paper jams (P44 only)



SECURIO P40



SECURIO P44



| Model | SECURIO P40 | | SECURIO P44 | |
|---|-------------------|------------------------|-------------------|------------------------|
| Cutting type | strips | particles | strips | particles |
| Cutting size in mm | 5.8 / 3.9 | 3.9x50 / 1.9x15 / 1x5 | 5.8 / 3.9 | 3.9x50 / 1.9x15 / 1x5 |
| Security level DIN 32757-1 | 2 / 2 | 3 / 4 / HS Level 6 | 2 / 2 | 3 / 4 / HS Level 6 |
| Cutting capacity* 70 g/m ² in sheets | 58 - 60 / 45 - 47 | 35 - 37 / 22 - 24 / 10 | 76 - 78 / 61 - 63 | 43 - 46 / 28 - 30 / 12 |
| Cutting capacity* 80 g/m ² in sheets | 49 - 51 / 38 - 39 | 29 - 31 / 18 - 20 / 8 | 70 - 72 / 56 - 58 | 39 - 41 / 23 - 25 / 10 |
| Intake width in mm | 330 | 330 | 400 | 400 |
| Motor | 2,100 W | 2,100 W | 2,600 W | 2,600 W |
| Voltage / Frequency | 230 V / 50 Hz | 230 V / 50 Hz | 230 V / 50 Hz | 230 V / 50 Hz |
| Dimensions W x D x H in mm | 580 x 550 x 936 | 580 x 550 x 936 | 700 x 592 x 1,025 | 700 x 592 x 1,025 |
| Weight in kg | 70-74 | 70-74 | approx. 108 | approx. 108 |
| Container/collection volume | 145 l | 145 l | 205 l | 205 l |
| Applicable for paper and | | | | |

* max. per cycle for DIN A4, 70 g/m² or DIN A4, 80 g/m²

All technical data and dimensions are approximate values. Technical and design modifications reserved.

The new functions on the SECURIO and HSM models



OMDD Cutting unit

SECURIO P40 and P44:

The separate OMDD cutting unit shreds CDs and DVDs in particle cut at the highest security level 2.2 x 4 mm (optional).



PAPERcontrol

SECURIO P44

(integrated as a standard feature):

PAPERcontrol (measures paper thickness) makes it easy and convenient to prevent paper jams. The unit features three LED lights indicating whether the stack of paper can be shredded in one cycle or not.



PAPERcontrol

PAPERcontrol SECURIO B34 (optional)



External oiler

External oil for automatic oiling – ensures a consistently high cutting performance and quality. It prevents paper jams and heavy wear. Optionally available for the models: SECURIO B24, B32, B34 and HSM 105.3, 108.2, 125.2, 225.2, 386.2, 390.3, 411.2.

HSM FA 500.3 Premium – the top model at security level 4

- For large EDP departments, archives or as a central document shredding point
- Its sturdy technology has been especially designed for a large throughput (up to 1 t) and long total operating times
- Throughput capacity at security level 4: 250 kg/h
- Integrated automatic oiler for a consistently high cutting unit capacity
- Also suitable for shredding CDs and diskettes, files and folders
- Material intake via loading table and electric conveyor belt
- Emergency-stop rail makes it even safer
- Multifunction operating control



| Model | HSM FA 500.3 Premium | | | |
|---|-----------------------------|-----------------------|-----------------------|-----------------------|
| Cutting type | Particles | Particles | Particles | Particles |
| Cutting size in mm | 10.5 x 40-76 | 7.5 x 40-80 | 6 x 40-53 | 1.9 x 15 |
| Security level DIN 32757-1 | 2 | 2 | 3 | 4 |
| Cutting capacity* 70 g/m ² in sheets | 600 - 650 | 500 - 550 | 400 - 450 | 120 - 130 |
| Cutting capacity* 80 g/m ² in sheets | 510 - 550 | 425 - 470 | 340 - 380 | 90 - 100 |
| Intake width in mm | 500 | 500 | 500 | 500 |
| Motor | 9.2 kW | 9.2 kW | 9.2 kW | 9.2 kW |
| Voltage / Frequency | 3x 400 V / 50 Hz | 3x 400 V / 50 Hz | 3x 400 V / 50 Hz | 3x 400 V / 50 Hz |
| Dimensions W x D x H in mm | 1,170 x 1,795 x 1,795 | 1,170 x 1,795 x 1,795 | 1,170 x 1,795 x 1,795 | 1,170 x 1,795 x 1,795 |
| Weight in kg | 790 | 790 | 790 | 920 |
| Container/collection volume | 530 / 2 x 265 | 530 / 2 x 265 | 530 / 2 x 265 | 530 / 2 x 265 |
| Applicable for paper and | | | | |

* max. per cycle for DIN A4, 70 g/m² or DIN A4, 80 g/m²

All technical data and dimensions are approximate values. Technical and design modifications reserved.