

HSM V-Press 825



HSM V-Press 825 plus vertical baling press

The HSM V-Press 825 is characterized by its very low transport height.

Technical data

Order number:	6152203	Loading aperture width x height:	47.05" x 20.87"
EAN	4026631063555	Bale length x Bale width x Bale height:	47.24" x 30.71" x 27.56"
Pressing power:	25 t	Bale weight:	617 lb
Specific pressing power:	37,7 psi	Width x Depth x Height:	66.93" x 41.18" x 93.31"
Driving power:	6.44 HP	Weight:	2343.51 lb
Voltage / Frequency:	480 V / 60 Hz	Type of consumables:	Strapping tape
Cycle time when idling vacío:	39 s	Press material:	Plastic film, Mixed paper, Cardboard
Volume throughput in idle operation (theor.):	247 cft/h		
Loading height:	37.7"		

Product information



To fill the press, the upper half of the doors is pushed down and automatically opens after the compression process



To fill the press, the upper half of the doors is folded down



Hand wheel door lock - Easy to handle thanks to counter-rotating thread for quick opening and closing




Compresses cardboard and film

Suitable for cardboard as well as film.



Automatic start

Automatic start of the pressing process after closing the door.

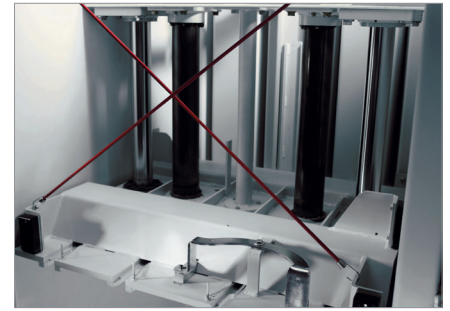

Optimized pressing

Massive press ram and extremely robust press plate guidance.




Graphic-capable display

Convenient membrane keypad with text display, which shows the current status of the machine.




HSM TCS

HSM TCS (Torsion Control System) for monitoring press ram movement.

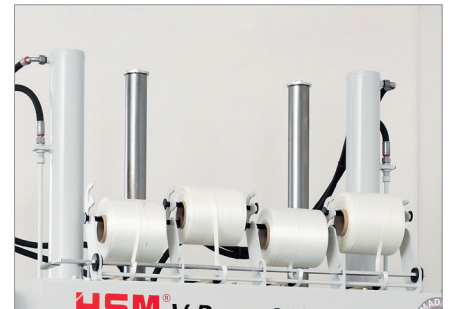

Strapping

Manual bale strapping with continuous polyester tape.



* UL 508A Industrial Control Panels (not for HSM V-Press 605)

www.hsm.eu

HSM®