



# HSM Powerline FA 400.2 - 1/4

## HSM Powerline FA 400.2 heavy duty document shredder

Thanks to its large throughput, this sturdy and durable heavy duty document shredder is perfect for use in archives or central stations for document shredding.

### Technical data

<b>Order number:</b>	1513147	<b>Intake width:</b>	16.85"
<b>EAN</b>	4026631020817	<b>Container volume / collecting:</b>	121.5 gal
<b>Cutting type:</b>	strip cut	<b>Noise level (idle operation):</b>	ca. 61 dB(A)
<b>Security level (DIN 66399):</b>	E-2   O-2   P-2   T-2	<b>Weight:</b>	954.6 lb
<b>Cutting capacity in sheets 80g/m²:</b>	104	<b>Shredder material:</b>	Paper, Staples and paper clips, Credit card, CD/DVD, Crumpled paper, Floppy disk, Computer listings
<b>Driving power:</b>	5.36 HP		
<b>Voltage / Frequency:</b>	208 V / 60 Hz		

### Product information




We have integrated a manual oiler into the device which will ensure it runs smoothly, giving a consistently high cutting capacity and quality.



Our device has a practical storage table to put data carriers on before or during your shredding operations.



The device can be used on a mobile basis and has smooth-running, stable castors with a parking brake.

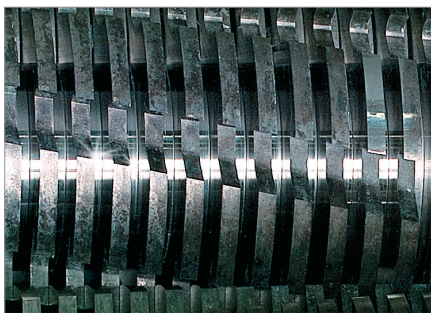

### Specially hardened solid steel cutting rollers

The induction-hardened solid steel cutting rollers are wear-resistant and guarantee durability.



### Continuous operation

Powerful drive allows continuous operation.



### Compression into boxes or waste bag

The shredded material which has been compressed into compact bales can be cleanly disposed of either in a box (HSM SP 4040 V) or a waste bag (HSM SP 4040 V, HSM SP 5080). These prevent particles from falling out and ensure clean handling.



### Bale weight can be manually set

The bale weight is variable and depends on your requirement (HSM SP 5080, HSM SP 5088).



### User safety through emergency off switch

It may be necessary to stop the machine immediately so we have equipped the device with an emergency off switch.



### Dust extractor

The powerful and energy efficient dust extractor HSM DE 4-100 in dust classification M ensures an optimal extraction due to the high air flow volume, thereby reducing dust emissions (accessory).



\*HSM Powerline SP 5080 / SP 5088

