

HSM V-Press 610



HSM V-Press 610 vertical baling press

The HSM V-Press 610 reduces the volume of cardboard or foils in an economical way.

Technical data

Order number:	6110113	Loading aperture width x height:	31.5" x 19.49"
EAN	4026631074261	Bale length x Bale width x Bale height:	31.5" x 23.62" x 23.62"
Pressing power:	12 t	Bale weight:	220 lb
Specific pressing power:	36,3 psi	Method of loading:	manual
Driving power:	5.1 HP	Width x Depth x Height:	47.17" x 32.4" x 78.19"
Voltage / Frequency:	480 V / 60 Hz	Weight:	1190.49 lb
Cycle time when idling vacío:	22 s	Type of consumables:	Strapping tape
Volume throughput in idle operation (theor.):	221 cft/h	Press material:	Plastic film, Mixed paper, Cardboard
Loading height:	25.8"		

Product information



To fill the press, the upper half of the doors is swung to the right



Hand wheel door lock - Easy to handle thanks to counter-rotating thread for quick opening and closing



Special retaining claws optimize the compression of the pressing material and reduce the number of loading actions

HSM®




Compresses cardboard and film

Suitable for cardboard as well as film.



Automatic start

Automatic start of the pressing process after closing the door.

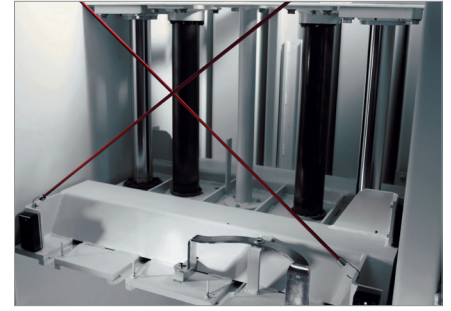

Optimized pressing

Massive press ram and extremely robust press plate guidance.




Graphic-capable display

Convenient membrane keypad with text display, which shows the current status of the machine.



HSM TCS

HSM TCS (Torsion Control System) for monitoring press ram movement.

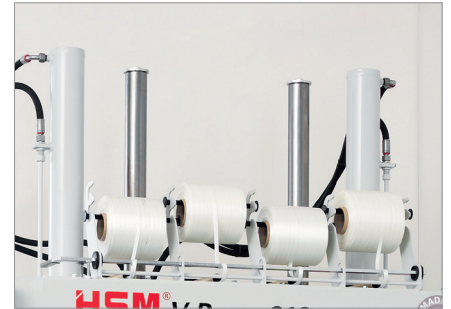

Strapping

Manual bale strapping with continuous polyester tape.



* UL 508A Industrial Control Panels (not for HSM V-Press 605)

www.hsm.eu

