



VK 2310

Channel baling press HSM VK 2310

For industrial applications with small material loads - Troughput up to approx. 5,090 ft³/h


Technical data

Order number:	6650004	Loading aperture width x Loading aperture length:	26.38" x 39.37"
Pressing power:	24 t	Bale width x Bale height x Bale length:	29.53" x 19.69" x 23.62 - 47.24"
Specific pressing power:	92,8 psi	Bale weight:	551 lb
Driving power:	20.12 HP	Length x Width x Height:	239.96" x 112.72" x 76.38"
Voltage / Frequency:	480 V / 60 Hz	Weight:	8598.02 lb
Cycle time when idling vacío:	9,4 s	Type of consumables:	Wire
Volume throughput in idle operation (theor.):	5090 cft/h	Press material:	Plastic film, Mixed paper, Cardboard, Punch waste/residue, PET beverage and aluminium cans, soft packaging, PET
Volume throughput at 84 lb/yd³ (theor.):	7.2 t		

Product information



Compresses paper, cardboard, plastic film and PET bottles



Loading aperture of 1000 mm suitable for larger material pieces and higher throughput rates




Available as an option with manual strapping

HSM®



System solution

Integration into automated industrial production processes.

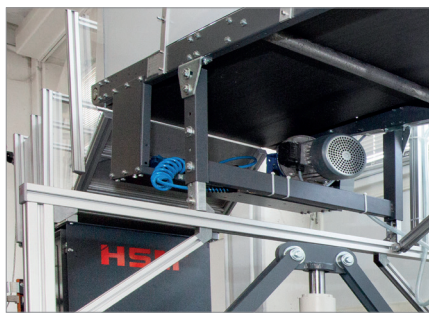

Continuous loading

Suitable for continuous loading with conveyor belt, air feeding or similar.



Compact bales

The bales can be stacked and are easy to transport.



Automatic operation

Control of the pressing process via light barrier.



Operating side

Can be fully integrated into existing workflows and processes. Operating side can be selected.



Sturdy design

Very low space requirement thanks to compact and sturdy design.

