



## HSM VK 1210

Für Industrieanwendungen mit kleinem bis mittlerem Materialaufkommen - Durchsatz bis ca. 117 m<sup>3</sup>/h

### Technical data

|                      |              |                                       |             |
|----------------------|--------------|---------------------------------------|-------------|
| <b>Order number:</b> | 6617001      | <b>Pressing power<sup>2</sup>:</b>    | 159 t       |
| <b>Bale weight:</b>  | 100 x 200 lb | <b>Bale size (LxWxH)<sup>2</sup>:</b> | 750 x 500 " |
| <b>Strapping:</b>    | 3            |                                       |             |

### Product Information:



Loading aperture of 1000 mm suitable for larger material pieces and higher throughput rates



Suitable for continuous loading with conveyor belt, air feeding or similar



Very low space requirement thanks to compact and sturdy design

## Product Information:




Operating side can be selected




Integration into automated industrial production processes



Particularly suitable for cardboard, plastic film and PET bottles

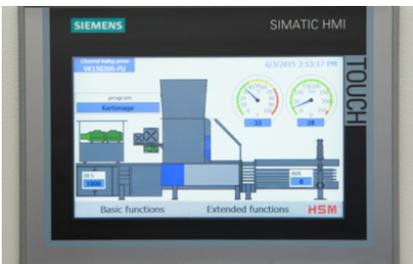

Control of the pressing process via light barrier

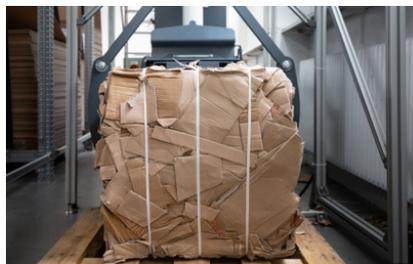

Available as an option with manual strapping

