

## HSM VK 5012

Für die professionelle Entsorgungswirtschaft oder größere Industrieanwendungen – mit hohen Durchsatzleistungen bis ca. 442 m<sup>3</sup>/h



### Technical data

<b>Order number:</b>	6461001	<b>Pressing power<sup>2</sup>:</b>	500 t
<b>Bale weight:</b>	300 x 480 lb	<b>Bale size (LxWxH)<sup>2</sup>:</b>	1100 x 750 "
<b>Strapping:</b>	4		

### Product Information:



Fully automatic 5-fold strapping for optimal bale result also with expansive materials



Available as an option with frequency-regulated drive – saves 40 % of the energy used by standard drives



Control of the pressing process via light barrier. Suitable for continuous loading with conveyor belt, air feeding or similar

## Product Information:




Suitable for cardboard, plastic film and compressing DSD goods, UBC as well as PET bottles (other materials on request)




Versatile solution for materials up to approx. 60 kg /m<sup>3</sup> bulk weight



Optimally adjusted software for different materials guarantees high bale quality even when material is frequently changed

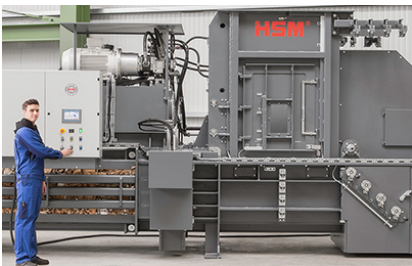

Especially large loading aperture for bulky materials

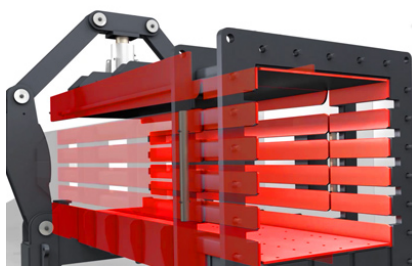

Solid steel construction with highly wear resistant steel parts inside the press chamber and press channel

