

HSM VK 5016

Für die professionelle Entsorgungswirtschaft
oder größere Industrieanwendungen – mit hohen
Durchsatzleistungen bis ca. 485 m³/h



Technical data

Order number:	6462003	Pressing power²:	500 t
Bale weight:	- x - lb	Bale size (LxWxH)²:	1100 x 750 "
Strapping:	4		

Product Information:



With large loading aperture for
optimised feeding methods
(1600 mm length)



Fully automatic 5-fold strapping
for optimal bale result also with
expansive materials



Available as an option with
frequency-regulated drive –
saves 40 % of the energy used
by standard drives

Product Information:



Control of the pressing process via light barrier. Suitable for continuous loading with conveyor belt, air feeding or similar




Suitable for cardboard, plastic film and compressing DSD goods, UBC as well as PET bottles (other materials on request)



Versatile solution for materials up to approx. 50 kg /m³ bulk weight



Optimally adjusted software for different materials guarantees high bale quality even when material is frequently changed

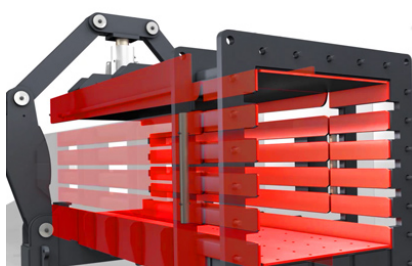

Solid steel construction with highly wear resistant steel parts inside the press chamber and press channel

