



## HSM VK 7215

Für die professionelle Entsorgungswirtschaft  
oder größere Industrieanwendungen mit hohen  
Durchsatzleistungen - Durchsatz bis ca. 498  
m<sup>3</sup>/h

### Technical data

|                      |              |                                       |              |
|----------------------|--------------|---------------------------------------|--------------|
| <b>Order number:</b> | 6445003      | <b>Pressing power<sup>2</sup>:</b>    | 720 t        |
| <b>Bale weight:</b>  | 340 x 620 lb | <b>Bale size (LxWxH)<sup>2</sup>:</b> | 1100 x 750 " |
| <b>Strapping:</b>    | 5            |                                       |              |

### Product Information:



Fully automatic 5-fold strapping  
for optimal bale result also with  
expansive materials



Determining the bale length  
exactly, even in the case of  
frequently exchanged material




Available as an option with  
frequency-regulated drive –  
saves 40 % of the energy used  
by standard drives

## Product Information:




Control of the pressing process via light barrier. Suitable for continuous loading with conveyor belt, air feeding or similar

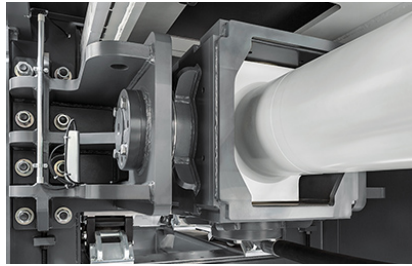

Gimballed press cylinder system  
- Reduced wear on the pressing cylinder and press ram guides



Suitable for cardboard, plastic film and compressing DSD goods, UBC as well as PET bottles (other materials on request)

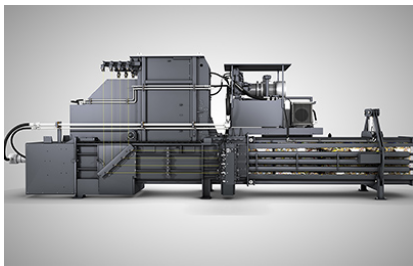

Available as an option suitable for residual waste (with wear-resistant steel)



Versatile solution for materials up to approx. 60 kg /m<sup>3</sup> bulk weight

