



## HSM VK 8818

Für die professionelle Entsorgungswirtschaft oder größere Industrieanwendungen mit hohen Durchsatzleistungen - Durchsatz bis ca. 643 m<sup>3</sup>/h

### Technical data

|                      |              |                                       |              |
|----------------------|--------------|---------------------------------------|--------------|
| <b>Order number:</b> | 6429004      | <b>Pressing power<sup>2</sup>:</b>    | 880 t        |
| <b>Bale weight:</b>  | 500 x 700 lb | <b>Bale size (LxWxH)<sup>2</sup>:</b> | 1100 x 750 " |
| <b>Strapping:</b>    | 5            |                                       |              |

### Product Information:



Fully automatic 5-fold strapping for optimal bale result also with expansive materials




Available as an option with frequency-regulated drive – saves 40 % of the energy used by standard drives



Control of the pressing process via light barrier. Suitable for continuous loading with conveyor belt, air feeding or similar


## Product Information:

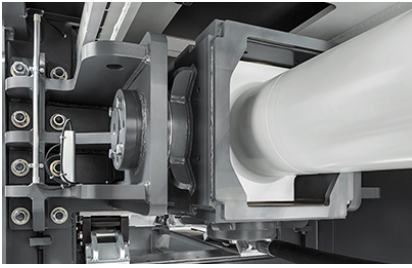

Gimballed press cylinder system  
- Reduced wear on the pressing cylinder and press ram guides



Suitable for cardboard, plastic film and compressing DSD goods, UBC as well as PET bottles (other materials on request)

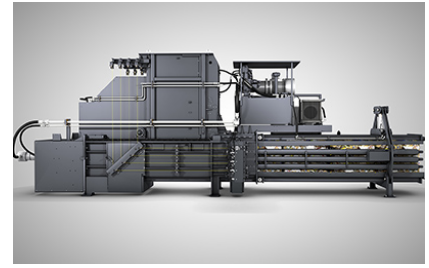

Available as an option suitable for residual waste (with wear-resistant steel)



Versatile solution for materials up to approx. 60 kg /m<sup>3</sup> bulk weight



Solid steel construction with extremely wear-resistant, replaceable steel

