

## HSM VK 5012

Für die professionelle Entsorgungswirtschaft  
oder größere Industrieanwendungen – mit hohen  
Durchsatzleistungen bis ca. 442 m<sup>3</sup>/h



### Technical data

<b>Order number:</b>	6461003	<b>Pressing power:</b>	500 t
<b>Maximum bale weight:</b>	480 lb	<b>Bale size (LxWxH):</b>	1100 x 750 "
<b>Strapping:</b>	4		

### Product Information:



Fully automatic 5-fold strapping  
for optimal bale result also with  
expansive materials



Available as an option with  
frequency-regulated drive –  
saves 40 % of the energy used  
by standard drives



Control of the pressing process  
via light barrier. Suitable for  
continuous loading with conveyor  
belt, air feeding or similar

## Product Information:




Suitable for cardboard, plastic film and compressing DSD goods, UBC as well as PET bottles (other materials on request)




Versatile solution for materials up to approx. 60 kg /m<sup>3</sup> bulk weight



Optimally adjusted software for different materials guarantees high bale quality even when material is frequently changed

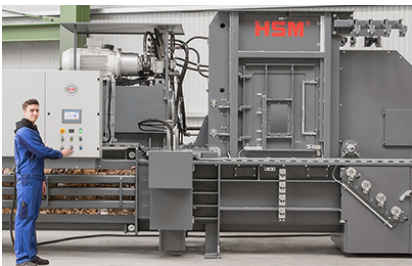

Especially large loading aperture for bulky materials

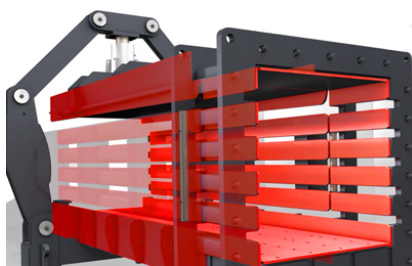

Solid steel construction with highly wear resistant steel parts inside the press chamber and press channel

