

## HSM VK 5016

Für die professionelle Entsorgungswirtschaft  
oder größere Industrieanwendungen – mit hohen  
Durchsatzleistungen bis ca. 485 m<sup>3</sup>/h



### Technical data

<b>Order number:</b>	6462003	<b>Pressing power:</b>	500 t
<b>Maximum bale weight:</b>	- lb	<b>Bale size (LxWxH):</b>	1100 x 750 "
<b>Strapping:</b>	4		

### Product Information:



With large loading aperture for  
optimised feeding methods  
(1600 mm length)



Fully automatic 5-fold strapping  
for optimal bale result also with  
expansive materials



Available as an option with  
frequency-regulated drive –  
saves 40 % of the energy used  
by standard drives

## Product Information:



Control of the pressing process via light barrier. Suitable for continuous loading with conveyor belt, air feeding or similar




Suitable for cardboard, plastic film and compressing DSD goods, UBC as well as PET bottles (other materials on request)



Versatile solution for materials up to approx. 50 kg /m<sup>3</sup> bulk weight



Optimally adjusted software for different materials guarantees high bale quality even when material is frequently changed

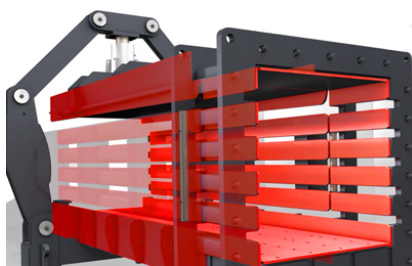

Solid steel construction with highly wear resistant steel parts inside the press chamber and press channel

