



## HSM VK 6015

Für Industrieanwendungen mit speziellen Anforderungen - Durchsatz bis ca. 291 m<sup>3</sup>/h

### Technical data

|                             |         |                           |             |
|-----------------------------|---------|---------------------------|-------------|
| <b>Order number:</b>        | 6442001 | <b>Pressing power:</b>    | 720 t       |
| <b>Maximum bale weight:</b> | 470 lb  | <b>Bale size (LxWxH):</b> | 750 x 750 " |
| <b>Strapping:</b>           | 4       |                           |             |

### Product Information:



Available as an option with frequency-regulated drive - saves 40 % of the energy used by standard drives



Control of the pressing process via light barrier. Suitable for continuous loading with conveyor belt, air feeding or similar




Gimballed press cylinder system - Reduced wear on the pressing cylinder and press ram guides

## Product Information:



Particularly suitable for compression of paper, cardboard, plastic film, production remains, e.g. trimmings from a variety of materials

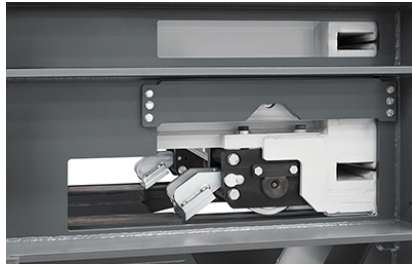

Solid press carriage guidance with easy maintenance access



Versatile solution for materials up to approx. 60 kg /m<sup>3</sup> bulk weight



Very high specific pressure for high compaction - High shearing force

