

HSM V-Press 860 plus

The HSM V-Press 860 combines high compaction force, a large loading aperture and outstanding operating convenience. Rapid stroke technology, retaining claws and the HSM TCS (TorsionControlSystem) ensure particularly economical operation. The smooth-running sliding door with automatic start saves space and makes loading easier. The handwheel door lock ensures secure locking.

Technical data

Order number:	6148213	Pressing power:	60 t
Maximum bale weight:	1058 lb	Bale size (WxHxL):	47.24 x 30.71 x 47.24 "
Loading aperture (WxH):	47.05 x 25.59 "	Number of strappings:	4
Type of consumables:	strapping wire	Motor:	6.44 HP
Voltage / Frequency:	480 V / 60 Hz	Cycle time:	25 s
Dimensions of machine (WxDxH):	68.94 x 62.17 x 117.52 "	Machine weight:	4475.38 lb

Product Information:



To fill the press, the upper half of the doors is pushed down and automatically opens after the compression process



Automatic start of the pressing process after closing the door



Convenient membrane keypad with text display, which shows the current status of the machine




With rapid traverse technology, the balers achieve short cycle times and support demand-oriented energy use in daily operation




Hand wheel door lock - Easy to handle thanks to counter-rotating thread for quick opening and closing



Optimised bale dimensions and bale weights for efficient storage, transport and direct commercialisation

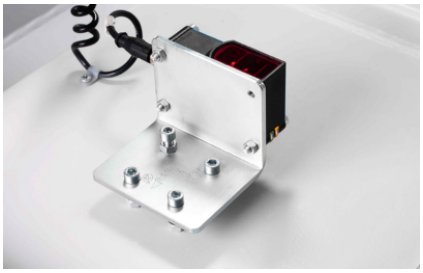


HSM TCS (Torsion Control System) for monitoring press ram movement

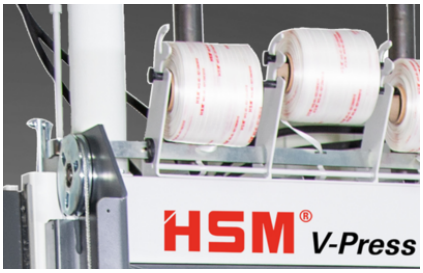

Manual bale strapping with continuous polyester tape



Suitable for cardboard as well as film



www.hsm.eu