HSM Powerline SP 5080 - 3.9 x 40 mm

This powerful combination of the FA 500.3 heavy duty document shredder and a counterplate baling press provides for data security in archives and compresses the shredded material into bales of between 40 and 80 kg.

Technical data

Order number:	2994209137	Cutting type:	particle cut
Security level (DIN 66399 / ISO/IEC 21964):	E-3|F-1|O-3|P-4|T-4	Cutting capacity in sheets 80g/m²:	180 - 200
Intake width:	19.69 "	Driving power:	15.42 hp
Voltage / Frequency:	208 V / 60 Hz	Pressing power:	8 t
Bale size (WxHxL):	22.44 x 19.29 x 31.5 "	Maximum bale weight:	176 lb
Width x Depth x Height:	49.88 x 97.4 x 70.55 "	Machine weight:	2976.24 lb

Product Information:

We have integrated an automatic oiler into the device which will ensure it runs smoothly, giving you a consistently high cutting capacity and quality.

Het balengewicht is afhankelijk van de wens variabel.

Modern control with membrane keyboard, graphics-capable text display and language selection.

The powerful motor ensures a high cutting capacity and reliable continuous operation.

The combination can be commissioned very easily using Plug-and-Play. The conveyor belt-shredder can therefore be combined with a press at any time.

The powerful and energy efficient dust extractor HSM DE 4-75 in dust classification M ensures an optimal extraction due to the high air flow volume, thereby reducing dust emissions (accessory).

The material feeding is convenient and takes place via the non-slip conveyor belt.

Safety is a high priority for HSM and so we have incorporated an emergency off safety bar on the loading table, which stops the device when pressure is applied.

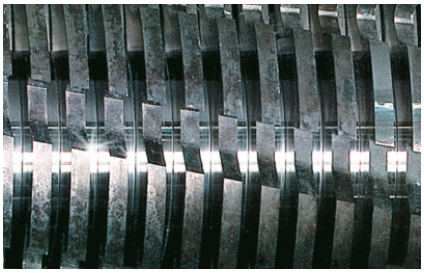

The induction-hardened, solid steel cutting rollers can easily cope with staples and paper clips and guarantee durability.

---

www.hsm.eu